



لاران صنعت

ارائه دهنده برترین برندهای

صنعت آسانسور



+98-21-38954



+98-21-22000857



info@laransanat.com



www.laransanat.com

laransanat




Elevator Door System BST

BFA کیفیت جهانی از برند BST در ایران




T2200-C2A Center-opening Landing Door





PL	600~1300
HL	2000~2500
IP Rating	IP2X
Landing Door Space	80~110
Floor Height Range	Standard $\geq$ HL+480
Guide Rail Type	Solid guide rail
Door Panel	1.2mm/1.5mm
Jamp	50*70
Forced Door Close	Spring
Landing Sill	54mm
Sill Decoration Space	Standard $\leq$ 100mm

J2511-C2A Center-opening Car Door

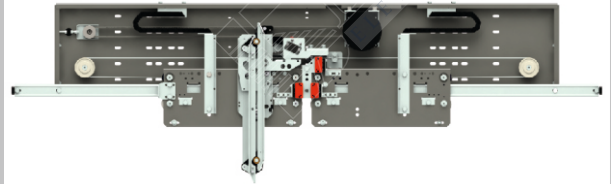

PL	600~1300
HL	2000~2500
Motor	2.3NM/47W
IP Rating	IP2X
Noise Level	$\leq$ 58dB
Door Vane	Integrated with car door lock
Guide Rail Type	Solid guide rail
Door Panel	1.2mm/1.5mm
Moving Max	160kg
Installation Method	Car top/Lintel
Car Sill	54mm

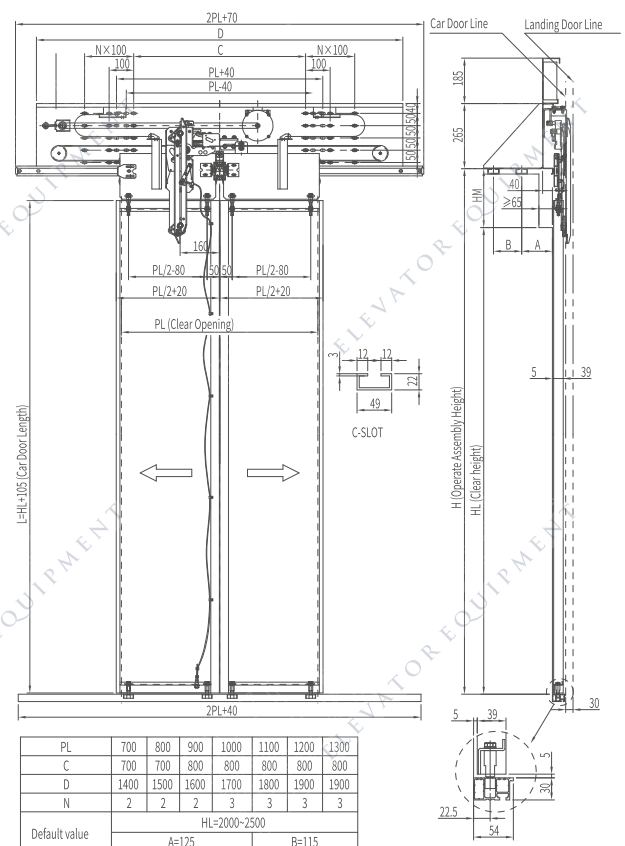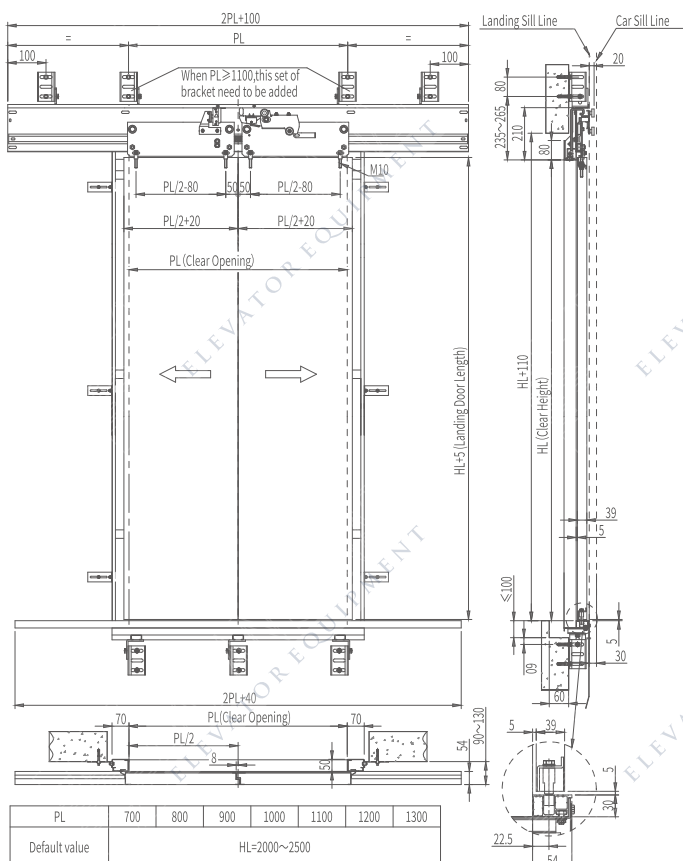

GF

Door System



LARAN SANAT
ELEVATOR EQUIPMENT



Classic design with
proven track record and stability



Door lock with self-lubricating bearing
with jam-free contact action



Independent solid guide rails
with exceptional load-bearing capacity




Labyrinth door panel structure
for high strength


T2200-C2B Center-opening Glass Landing Door




PL	700~1000
HL	2000~2300
IP Rating	IP2X
Landing Door Space	80~110
Floor Height Range	Standard $\geq$ HL+450
Guide Rail Type	Independent solid reinforced guide rail
Door Panel	Large window glass
Jamp	50*70
Forced Door Close	Spring
Landing Sill	54mm
Sill Decoration Space	30~50mm

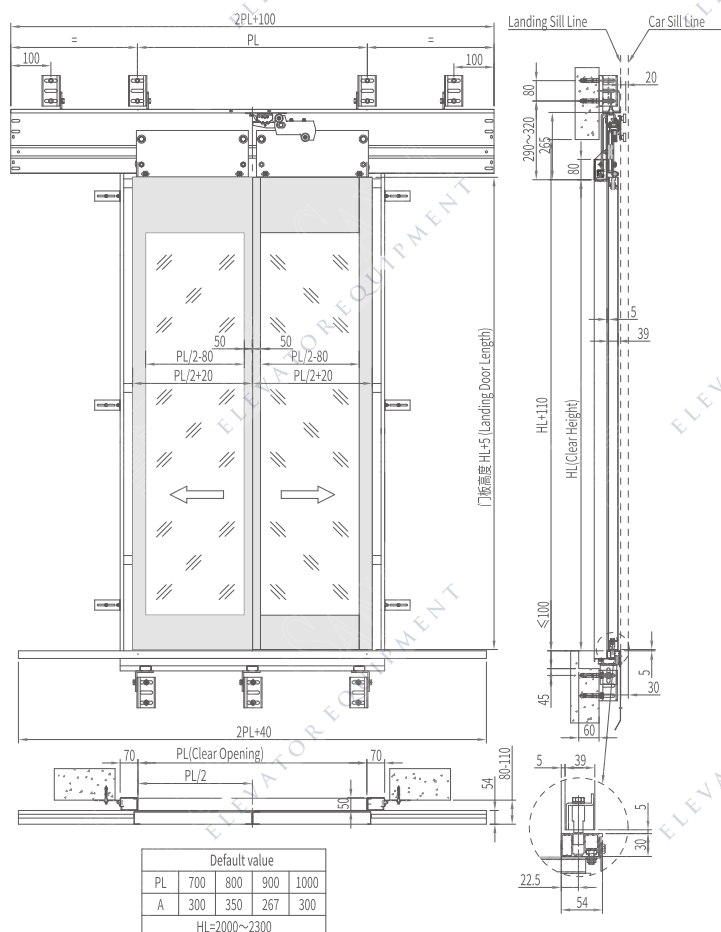


J2511-C2B Center-opening Glass Car Door

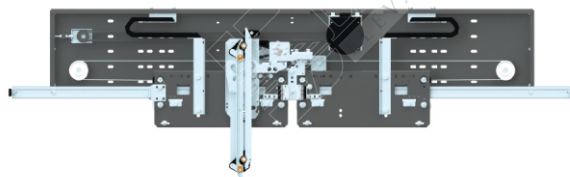


PL	700~1000
HL	2000~2300
Motor	5NM/86W
IP Rating	IP2X
Noise Level	$\leq$ 58dB
Door Vane	Integrated with car door lock
Guide Rail Type	Independent solid reinforced guide rail
Door Panel	Large window glass
Moving Max	300kg
Installation Method	Car top/Lintel
Car Sill	54mm

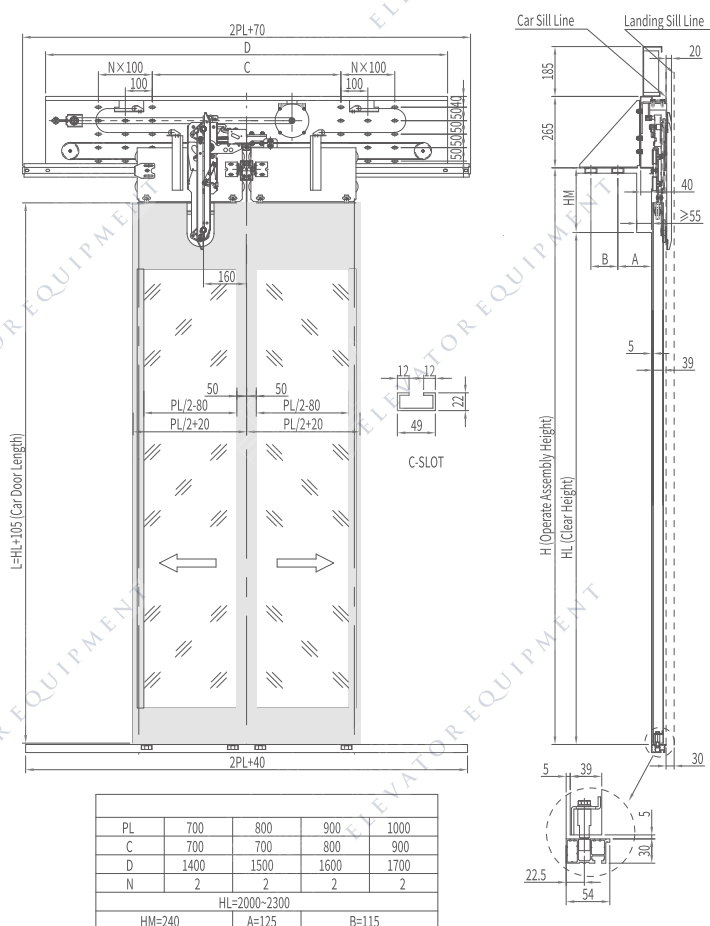

T2203-T2A Center-opening Fire-proof Landing Door




PL	700~1300
HL	2000~2500
IP Rating	IP2X
Landing Door Space	105~130
Floor Height Range	Standard≥HL+480
Guide Rail Type	Independent solid reinforced guide rail
Door Panel	1.2mm/1.5mm
Jamp	50*70
Forced Door Close	Spring
Landing Sill	90mm
Sill Decoration Space	Standard≤100mm

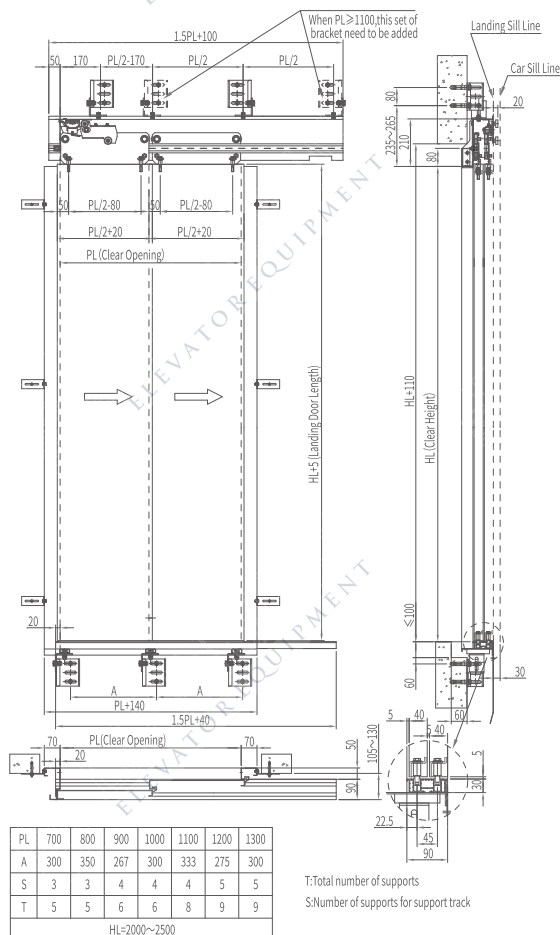


T: Total number of supports
S: Number of supports for support track

T2203-C2A Center-opening Fire-proof Landing Door



PL	700~1300
HL	2000~2500
IP Rating	IP2X
Landing Door Space	80~110
Floor Height Range	Standard≥HL+480
Guide Rail Type	Independent solid reinforced guide rail
Door Panel	1.2mm/1.5mm
Jamp	50*70
Forced Door Close	Spring
Landing Sill	54mm
Sill Decoration Space	Standard≤100mm

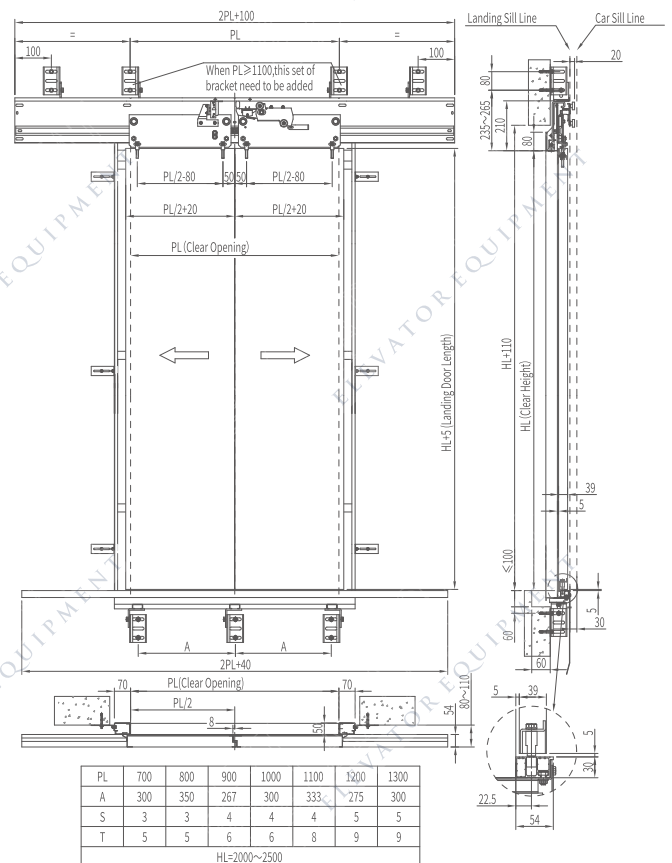


S: Number of supports for support track T: Total number of supports

T2200-T2A Side-opening Landing Door




PL	1300
HL	2000~2500
IP Rating	IP2X
Landing Door Space	105~130
Floor Height Range	Standard≥HL+480
Guide Rail Type	Independent solid guide rail
Door Panel	1.2mm/1.5mm
Jamp	50*70
Forced Door Close	Spring
Landing Sill	90mm
Sill Decoration Space	Standard≤100mm

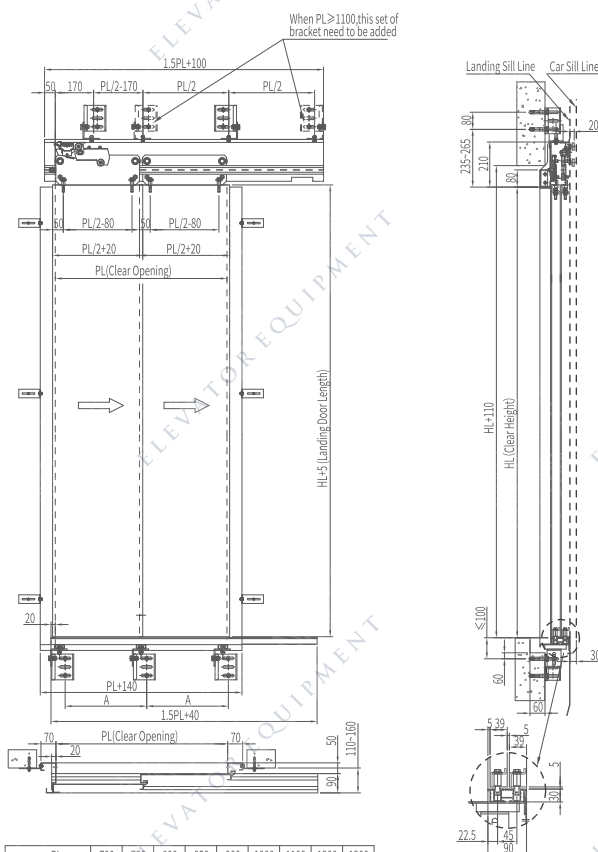[illegible]

S: Number of supports for support track
T: Total number of supports

J2511-T2A Side-opening Car Door

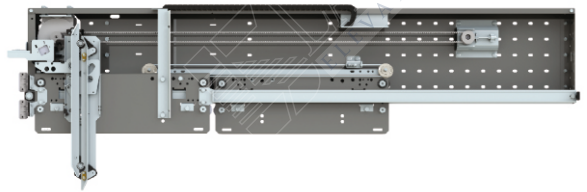

PL	600~1300
HL	2000~2500
Motor	2.3NM/47W
IP Rating	IP2X
Noise Level	≤58db
Door Vane	Integrated with car door lock
Guide Rail Type	Independent solid guide rail
Door Panel	1.2mm/1.5mm
Moving Max	160Kg
Installation Method	Car top/Lintel
Car Sill	90mm

